



APPLICATIONS	Direct/Indirect luminaire for exterior applications: flanking doors, lobby entrances or between windows. Materials specifically for use in corrosive and harsh environments.		
SIZE	• 12" L x 12" W x 4" D, 8 lbs		
	• 18.5" L x 18.5" W x 4" D, 15 lbs		
MOUNTING	J-Box 3.0 or 4.0 at center or end of fixture		
	 Steel mounting system with mounting plate and cover with rubber gaskets between the junction box and mounting plate 		
	Can be mounted vertically or horizontally		
SPECIFICATIONS	 IP66 Rated May be Power Washed at High Pressure (100kPa at distance of 3m) 		
	 120-277V input 		
	Title 24 Compliant		
	ADA Compliant		
	 100,000+ hours rated life time 		
	 10 Year Limited Warranty (excludes shade) 		
LAMPING	High efficiency, fully integrated propietary LED module		
	 80 CRI minimum (85 CRI typical) 		
	 CCT Options: 3000K, 3500K, 4000K 		
	 TEX-SQ-12: 24W, 792 lumens delivered 		
	TEX-SQ-18: 36W, 1188 lumens delivered		
	• 0-10V Dimming (100-10%)		
CONSTRUCTION	Fixture shell (shade): Heavy gauge aluminum with industrial powder coat finish and high impact acrylic		


TEX SOUARED ARCHITECTURAL SCALE, WET-LISTED EXTERIOR WALL SCONCE

alva




PHOTOMETRIC RESULTS





METAL POWDER COAT FINISH OPTIONS

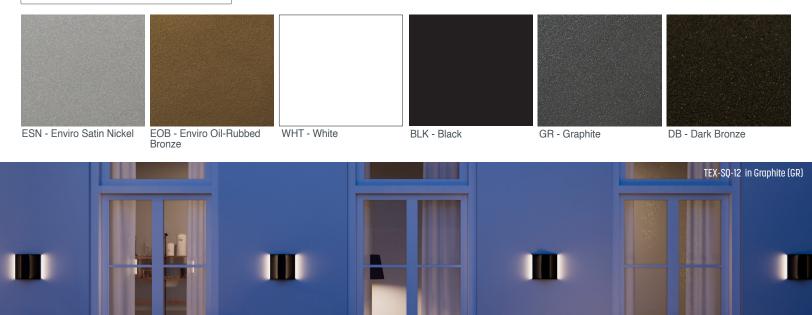

ORDER CODE:

TEX-SQUARED			
MODEL	SIZE	POWDER COAT METAL FINISH	ССТ
	18 18.5"L x 18.5"W x 4"D	ESN Enviro Satin Nickel	3000 3000K
	12 12"L x 12"W x 4"D	EOB Enviro Oil-Rubbed Bronze	3500 3500K
		GR Graphite	4000 4000K
		DB Dark Bronze	
		WHT White	

BLK Black